

# EXTERNAL CHARGER CHJ2

## Features:

- *Functional and elegant design*
- *Approx. charging time for BAJ1/BAJ2 battery pack: 4 hours*
- *The charger is of the SMPS type (Switch Mode Power Supply)*
- *Mains voltage: 100 - 240 V / 50 - 60 Hz*
- *Yellow light diode indicates whether the battery is charging*
- *Green light diode indicates whether the charger is connected to the mains*
- *Charging current up to 650 mA*
- *Protection class: IPX5 (only when mounted vertically)*
- *Colour: Bottom charcoal grey (RAL 7016) and top pale grey (RAL 7035)*
- *3.2 m exchangeable mains cable (black straight)*

## Options:

- *0.6 m coiled mains cable*
- *Customized front cover*
- *Cable hook for placing the mains cable*
- *Bottom cover for use when mounted on the MBJ3 mounting bracket.*

## Usage:

- *Ambient temperature: +5° to +40° C*
- *Approved according to EN 60601-1, CAN/CSA-C22.2 No. 601.1-M90 and UL 2601-1 (Medically approved).*

## Accessories:

Cable Hook:	00940015 (RAL 7016)
	00940065 (RAL 7035)
Bottom cover:	00940035 (RAL 7016)
	00940056 (RAL 7035)
Top cover:	00940037 (RAL 7035)
	00940036 (RAL 7016)



The charger CHJ2 has been specially designed for use as a wall-charger for the JUMBO system.

The CHJ2 charger is a Switch Mode Power Supply (SMPS) version which makes charging of the batteries more efficient.


The charging time for a BAJ1 or a BAJ2 battery pack is approx. 4 hours.

Mains voltage from 100 V AC - 240 V AC (50/60 Hz) is possible on same charger.

The charger indicates whether the charger is connected to the mains (green LED) or whether the battery is being charged (yellow LED).

Medically approved.

CHJ2:

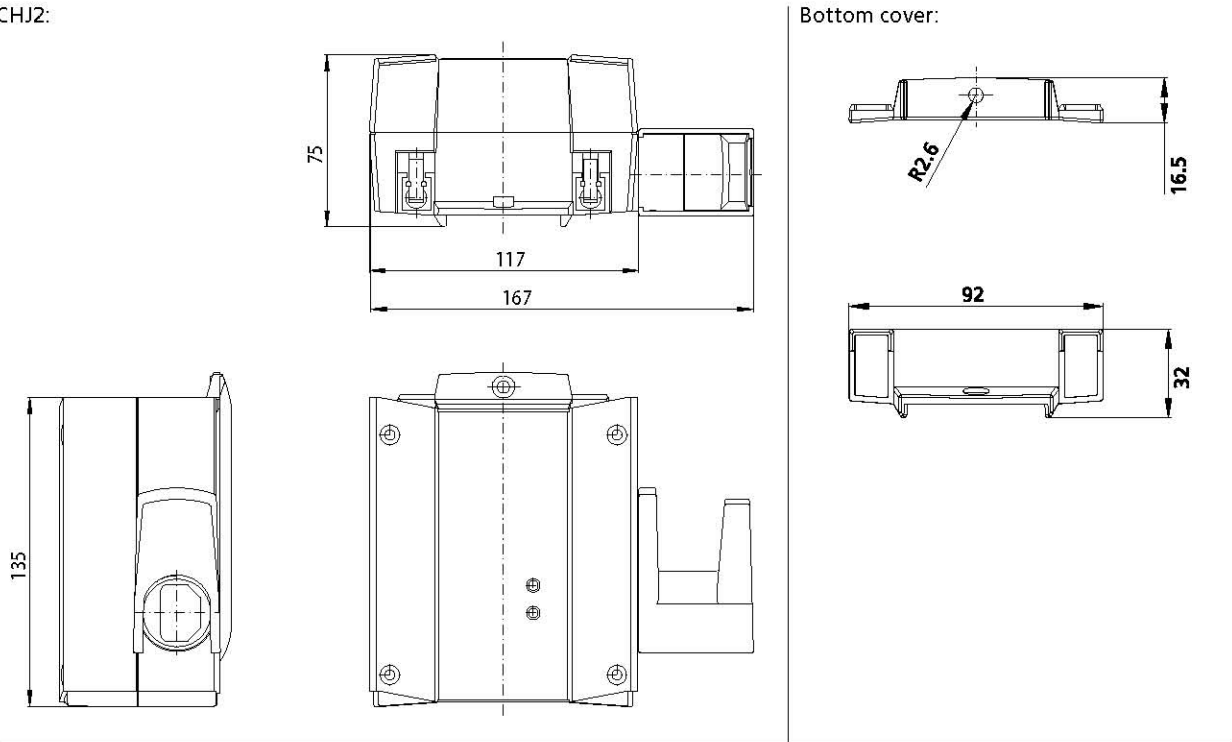

**CHJ2**

Ordering example:

**CHJ2 00 000 0 0 A 01 1**

- IP protection:** 1 = Standard (IPX5)
- Front cover:** 01 = Standard
- Cable:**
  - A Straight cable EU 2P (black)
  - B Coiled cable EU 2P (black)
  - C Straight cable JAPAN 2P (black)
  - D Straight cable UK, angel 2P (black)
  - F UL cable 2P (black)
  - G Straight cable EU 2P (grey)
  - H Coiled cable EU 2P (grey)
  - I Straight cable AUS 2P
  - K Straight cable AUS 2P
  - L Straight cable Switzerland 2P
  - J Without cable
- Voltage:** 0 = 100 - 240 V
- Option:**
  - 1 = With Cable hook (RAL 7035)
  - 2 = With cable hook (RAL 7016)
  - 3 = Without cable hook
- Bottom colour:**
  - 000 = Dark grey (RAL 7016)
  - 001 = Pale grey (RAL 7035)
- Not used**
- Type:** Charger CHJ2

**Terms of use**

The user is responsible for determining the suitability of LINAK products for specific application. LINAK takes great care in providing accurate and up-to-date information on its products. However, due to continuous development in order to improve its products, LINAK products are subject to frequent modifications and changes without prior notice. Therefore, LINAK cannot guarantee the correct and actual status of said information on its products. While LINAK uses its best efforts to fulfil orders, LINAK cannot, for the same reasons as mentioned above, guarantee the availability of any particular product. Therefore, LINAK reserves the right to discontinue the sale of any product displayed on its website or listed in its catalogues or other written material drawn up by LINAK. All sales are subject to the Standard Terms of Sale and Delivery for LINAK. For a copy hereof, please contact LINAK.