
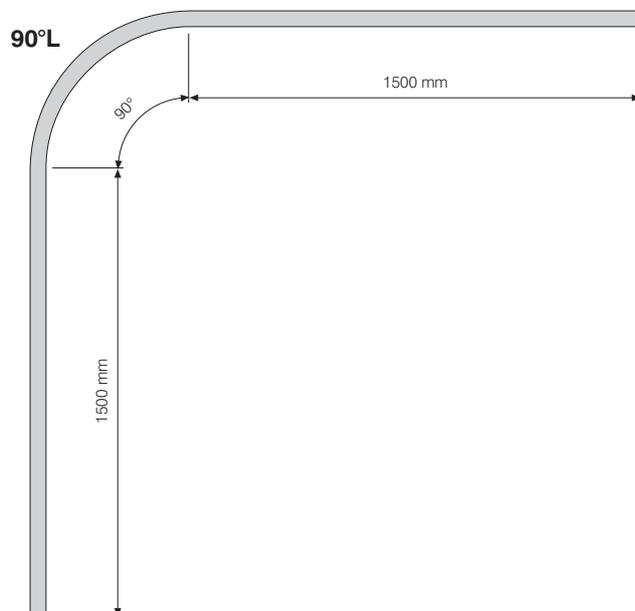
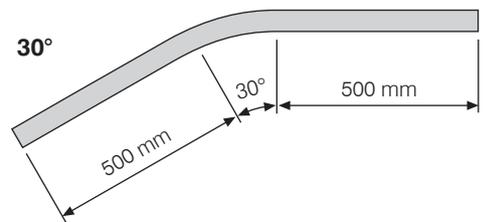
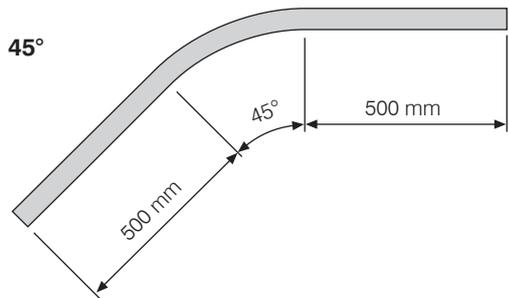
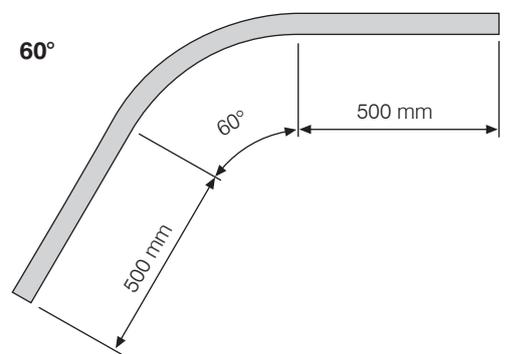


Rail curves are used where it is necessary to change the direction of the rail in a single rail system.

Rail curves are available in angles of 30°, 45°, 60° and 90°. All the curves have a centre radius of 500 mm.

As a minimum three brackets must be used to mount all rail curves – one of the brackets must always be placed in the centre of the curve.

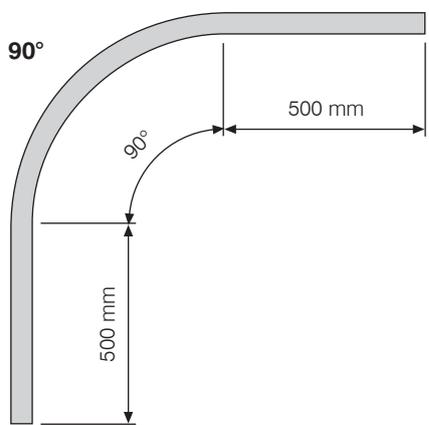

There are many possible combinations of rail curves.
 All standard curves end in a 500 mm straight rail.
 The dimensions given are absolutely minimum dimensions.

