

Dali-Low Entry 24 Volt



Clinic | Care | **Homecare** | Assist



Low entry height of 22 cm




www.evocare.com.au

Ph: 07 3355 8000 Fax: 07 3355 5043

Email: sales@evocare.com.au

Dali-Low Entry 24 Volt - The 22 cm extra-low entry care bed

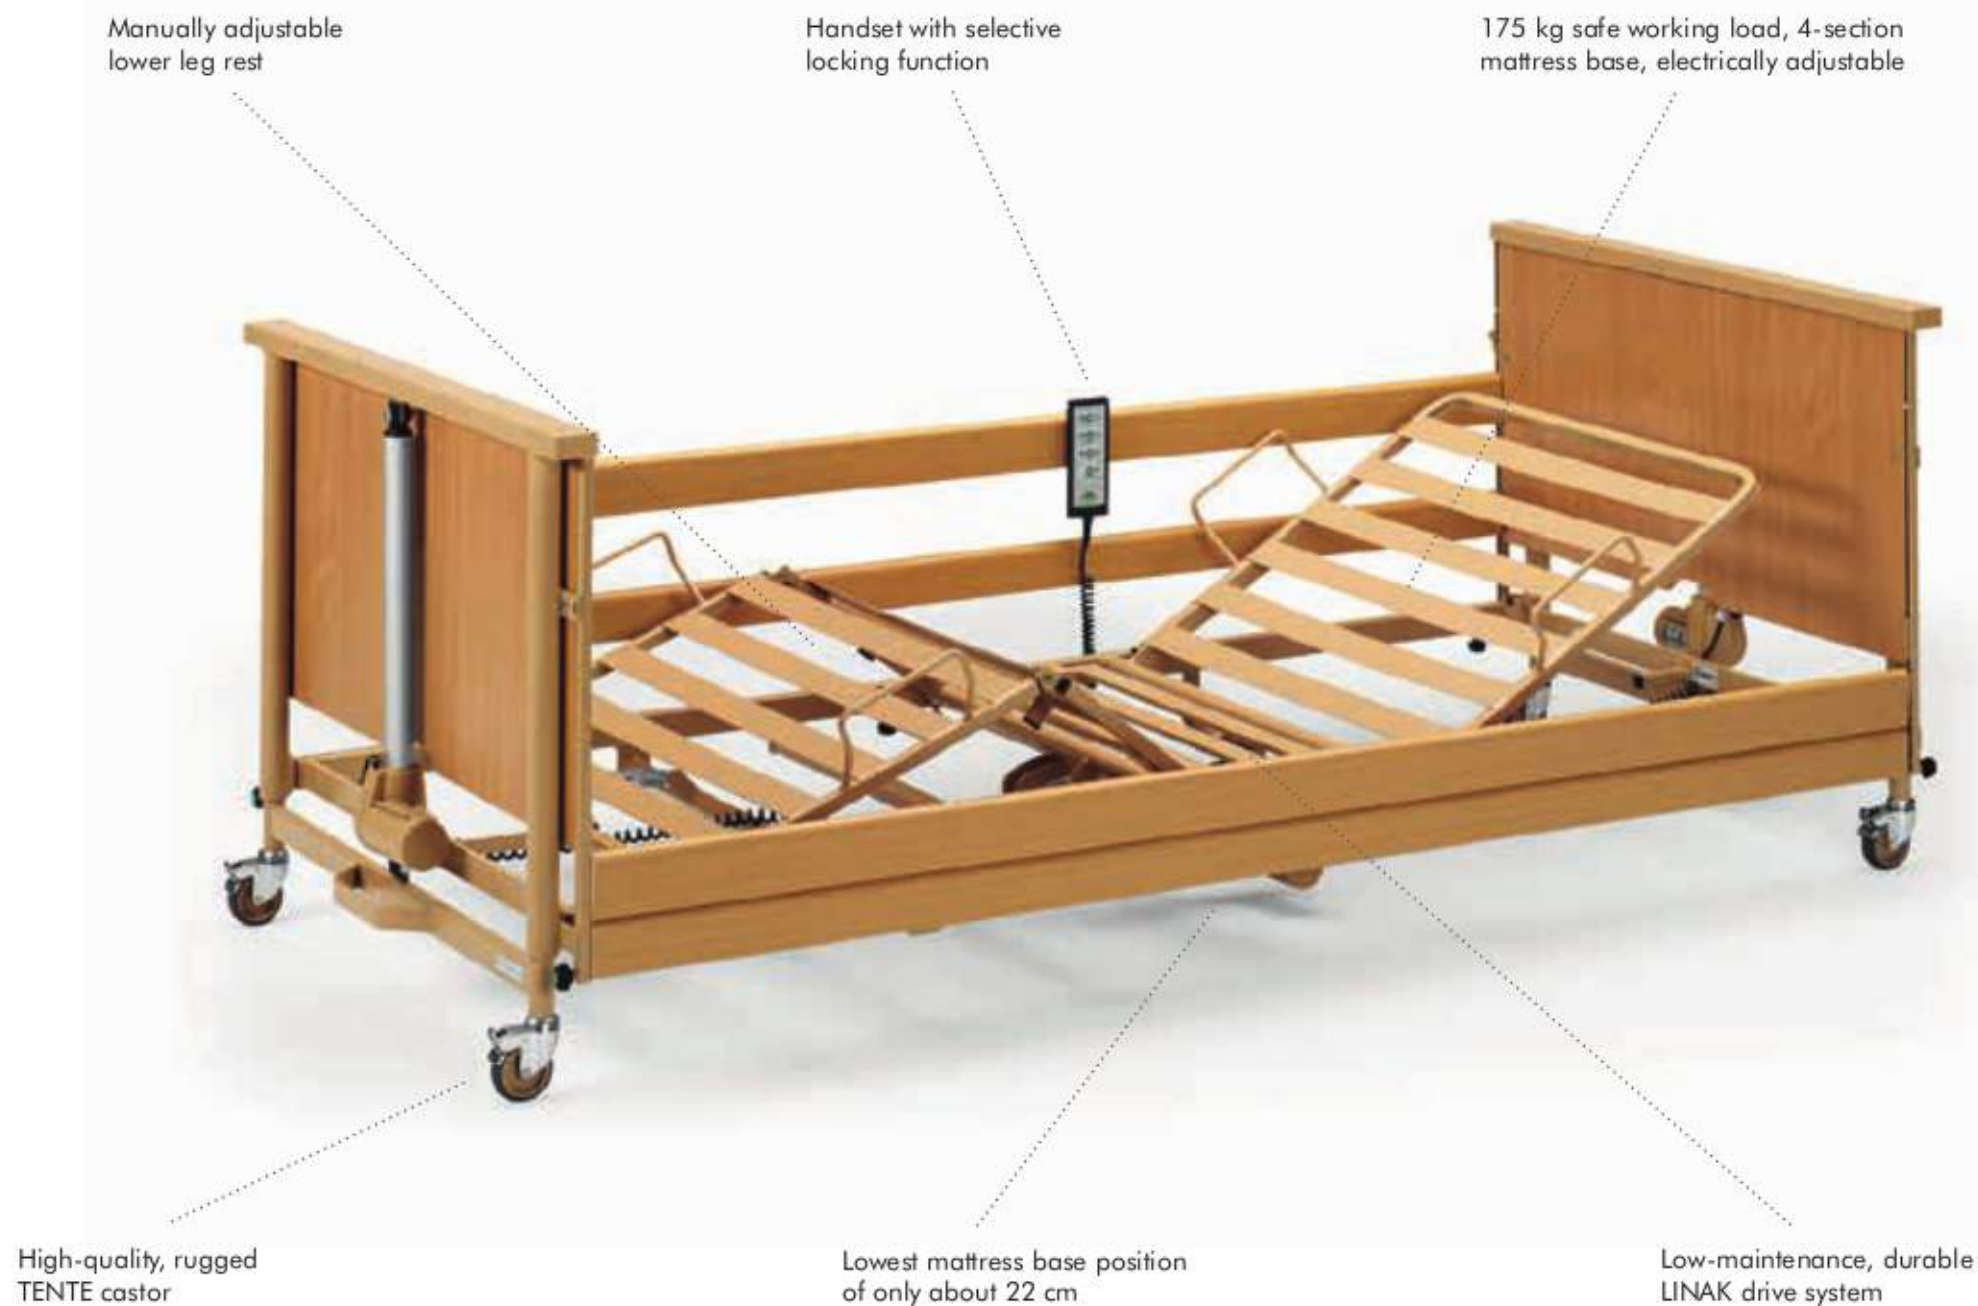

Advantages

Quality and durability

The "Dali-Low Entry 24 Volt" care bed is extremely sturdily constructed to stand up to the rigours of daily care. High-quality components make this a particularly durable, sturdy and low maintenance care bed that significantly reduces follow-on costs.

Cost-effective/Easy for one person to assemble

This bed offers exceptional value for money, but not at the expense of materials or design. The uncompromising use of high-quality materials is a hallmark of the Burmeier philosophy. This care bed can be assembled and dismantled by just one person, without tools, within a matter of minutes.

Low entry height of 22 cm

This provides ideal conditions for wheelchair users and people of small stature to get in and out of bed. This care bed meets all the requirements of a low entry bed.

24-volt drive system as standard

By using the 24-volt drive system, the prescribed intervals for leakage current testing are extended to such a degree that leakage current testing is no longer required during or beyond the expected service life of the bed. Please refer to the instruction manual for more information about this. The first leakage current test has already been conducted by the manufacturer. The 24 volt extra-low voltage saves electricity and enhances the safety of occupants.

Design details



Reverse-Trendelenburg position



Electronic switch mode power supply unit integrated immediately after the mains plug



Power socket for connecting the electronic switch mode power supply unit



Compact delivery and storage on storage aid/transportation aid

Dali-Low Entry 24 Volt care bed

Features

- Mattress base: 90 x 200 cm, with steel slats, 4-section, mattress base adjustment from 22 - 62 cm, backrest, thigh rest and mattress base height adjustable with electric motors
- Reverse-Trendelenburg position can be set by tilting the mattress base
- Metal parts finished with polyester powder coating in the colour topaz
- Headboard and footboard panels in beech decor
- Handset with selective locking function
- Low entry height of 22 cm
- Safe working load: 175 kg
- 24-volt drive system

Manufactured to: standard IEC 60601-2-52:2009



We reserve the right to change technical specifications without prior notice.
Last updated: 07/2016, Version 2, Item no. 600156

Accessories

(available at extra cost)



Wooden panels for the chassis
(also for retrofitting)



Reading lamps



Tray



Foam leather cover

Order numbers and external dimensions

51.0622.24 **Dali-Low Entry 24 Volt** care bed (wooden safety sides), length 224 cm, width 101 cm

19.1400.1 Lifting pole (included in supply package)

Burmeier GmbH & Co. KG

Pivitsheider Straße 270, 32791 Lage, Germany

Phone: +49 (0) 5232 9841 - 0

Fax: +49 (0) 5232 9841 - 41

Email: info@burmeier.com

www.burmeier.com

